


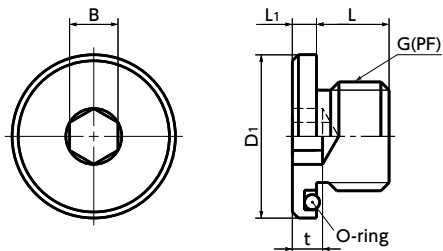

# SFMS Hexagon Socket Flange Head Screw Plugs **NEW**

[WEB Selection Tool](#)
[WEB CAD Download](#)


- Stainless steel type parallel pipe thread
- Because O-ring is provided, grooving is not required on the female screw side part material.
- Because this is a parallel thread, strain on the female screw side part material like tightened a taper thread does not occur. It is suitable for oil hydraulic equipment / pneumatic device that are often mounted and removed.

### ● Application

Oil hydraulic equipment / Pneumatic device / General industry machinery

### ● Material/Finish

Environmental Adaptability

	SFMS
Main unit	SUS304
O-ring	Fluoro-rubber (JIS B 2401 Type 4 D)

Unit : mm

Part Number	G (PF) Nominal of Thread	L	D1	L1	B	t	O-ring No.	Recommended Torque (N · m)	Mass (g)	Qty per pack
SFMS-1	G 1/8	8	19.5	4	5	4	P12.5	13.3	10	1
SFMS-2	G 1/4	12	23	4	6	5	P16	25.7	19	1
SFMS-3	G 3/8	12	27	4	8	6	P20	50.8	28	1
SFMS-4	G 1/2	14	35	5	10	6.5	P25	91.5	56	1

### ● Part number specification

## SFMS-2

Product Code      Nominal Diameter

Select the part number.

[1 Individual Sales](#) → P.0000  
 [Cleanroom Wash & Packaging](#) → P.0000  
 [Screw Length Adjustment](#) → P.0000  
 [Vibration Resistant](#) → P.0000  
 [Modification process for captive use](#) → P.0000

One bag contains one piece of this product.

Not Available

Not Available

Not Available

Not Available