


SNSS-TF Socket Head Cap Screws - Teflon Coating




[WEB Selection Tool](#)
[WEB CAD Download](#)
[Seizing Prevention](#)
[Chemical-proof](#)
[SUS Stainless steel](#)

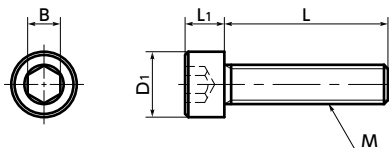

- Tightening property (reference)
Part Number : SNSS-M5 - 25-TF

➔ P.663

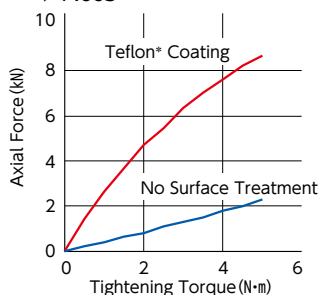

- Excellent chemical resistance.
- The coating has excellent lubricating ability and is suitable for prevention of seizing.

● Application

Seizing prevention. FPD production equipment, semiconductor devices, printed circuit board etching devices, metallic surface treatment equipment and facilities, and chemical plants

● Material/Finish

RoHS Compliant

	SNSS-TF
Main Body	SUSXM7 (S.S. Grade : A2) Teflon* Coating
Strength Class	A2-70

*Teflon is a registered trademark of DuPont.

Unit : mm

Part Number	M	L										D1	L1	B	Mass (g)	
SNSS-M3-TF	M3	5	6	8	10	12	16	20				5.5	3	2.5	0.67 - 1.4	
SNSS-M4-TF	M4		6	8	10	12	16	20	25			7	4	3	1.5 - 3.2	
SNSS-M5-TF	M5			8	10	12	16	20	25			8.5	5	4	2.5 - 4.8	
SNSS-M6-TF	M6				10	12	16	20	25	30		10	6	5	4.7 - 8.3	
SNSS-M8-TF	M8						16	20	25	30	35	13	8	6	12 - 19	
SNSS-M10-TF	M10							20	25	30	35	40	16	10	8	23 - 33

Part Number	Qty per pack
SNSS-M3-TF	1
SNSS-M4-TF	1
SNSS-M5-TF	1
SNSS-M6-TF	1
SNSS-M8-TF	1
SNSS-M10-TF	1

● Part number specification

SNSS - M6 - 25 - TF

Product Code **1** **2** Product Code

Individual Sales ➔ P.794	Cleanroom Wash & Packaging ➔ P.792	Screw Length Adjustment ➔ P.796	Vibration Resistant ➔ P.795	Modification process for captive use ➔ P.791
1 unit in 1 bag	Available / Add'l charge	Not Available	Not Available	Not Available