




# SRBS Hexalobular Button Head Cap Screws with Pin

Selection Tool  
 CAD Download  
 Tamper Resistance  
 SUS Stainless steel

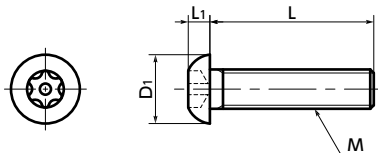

● Part number specification

## SRBS-M5 - 16



Order in number of packs.  
The minimum order quantity is 1 piece. → P.794

- Button head cap screws with pin at the center of their hexalobular\* socket.
- Screws cannot be installed or removed by using standard tools.
- Install and remove by using **SRX** Specialty Hexalobular Key.

\*The hexalobular shape is prescribed by JIS B 1015 : 2008 (ISO 10664 : 2005) "Hexalobular internal driving feature for bolts and screws".

● Application

Machinery, tools, equipment, and devices disassembly prevention · tampering prevention, theft prevention for outdoor facilities, security measures, and safety measures

● Material/Finish



SRBS	
Main Body	SUS304
Strength Class	Equivalent to A2-50

Unit : mm

Part Number	M	L										D1	L1	Applicable wrench	Hexalobular Socket No.	Mass (g)
<b>SRBS-M3</b>	M3	6	8	10	12	16	20	25				5.7	1.65	SRX-10	10	0.48 - 1.4
<b>SRBS-M4</b>	M4		8	10	12	16	20	25	30			7.6	2.2	SRX-20	20	1.2 - 3.2
<b>SRBS-M5</b>	M5			10	12	16	20	25	30	40		9.5	2.75	SRX-25	25	2 - 6.4
<b>SRBS-M6</b>	M6			10	12	16	20	25	30	40	50	10.5	3.3	SRX-30	30	3.3 - 12
<b>SRBS-M8</b>	M8			10	12	16	20	25	30	40	50	14	4.4	SRX-40	40	7.3 - 22


Part Number	Qty*1 per pack
<b>SRBS-M3</b>	20
<b>SRBS-M4</b>	20
<b>SRBS-M5</b>	20
<b>SRBS-M6</b>	10
<b>SRBS-M8</b>	10

\*1 The minimum order quantity is 1 piece. → P.794

● Dedicated wrench

Unit : mm

Part Number	L1	L2	Mass (g)	Qty per pack
<b>SRX-10</b>	60	20	3.7	1
<b>SRX-20</b>	67	23	8.2	1
<b>SRX-25</b>	70	25	11	1
<b>SRX-30</b>	81	28	20	1
<b>SRX-40</b>	88	31	32	1

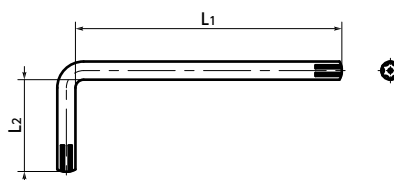

Individual Sales → P.794  
 Cleanroom Wash & Packaging → P.792  
 Screw Length Adjustment → P.796  
 Vibration Resistant → P.795  
 Modification process for captive use → P.791