


# SVFCS Hex Socket Countersunk Head Screws with Ventilation Hole



[WEB Selection Tool](#)
[WEB CAD Download](#)
[Vacuum](#)
[Cleanroom wash & packaging](#)
[SUS Stainless steel](#)

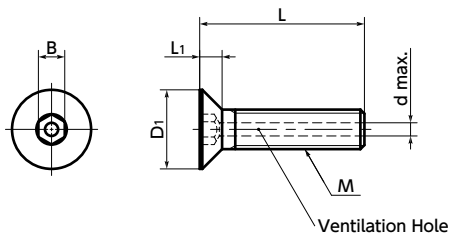

- The ventilation hole easily releases gas trapped in the screw holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- The flat head does not protrude after tightening.

### Application

Vacuum devices, vacuum chambers, FPD production equipment, semiconductor devices, and electron microscopes

### Material/Finish

RoHS Compliant

	SVFCS
Main Body	SUSXM7 (S.S. grade : A2)

Unit : mm


Part Number	M	L								D1	L1	B	d	Mass (g)
<b>SVFCS-M3</b>	M3	5	6	8	10	12				6	1.7	2	1.2	0.49 - 0.77
<b>SVFCS-M4</b>	M4		6	8	10	12	16			8	2.3	2.5	1.5	1 - 1.8
<b>SVFCS-M5</b>	M5			8	10	12	16	20		10	2.8	3	1.5	2.2 - 3.6
<b>SVFCS-M6</b>	M6				10	12	16	20	25	12	3.3	4	2	3.9 - 6.5
<b>SVFCS-M8</b>	M8					12	16	20	25	30	4.4	5	2	8.9 - 15

Part Number	Qty*1 per pack
<b>SVFCS-M3</b>	20
<b>SVFCS-M4</b>	20
<b>SVFCS-M5</b>	10
<b>SVFCS-M6</b>	10
<b>SVFCS-M8</b>	10

\*1 The minimum order quantity is 1 piece. → P.794

### Usage example

These screws are effective with vacuum devices and vacuum chambers that require the exhaustion of gas trapped in screw holes.

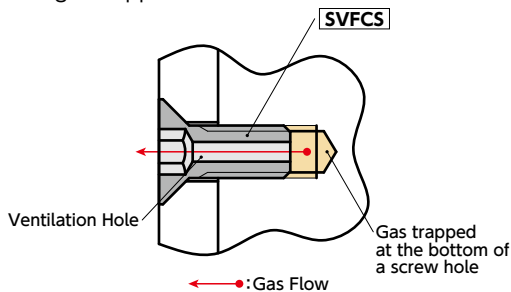

### Part number specification

**SVFCS-M5-20**

1 2

Order in number of packs.  
The minimum order quantity is 1 piece. → P.794

<a href="#">Individual Sales</a> → P.794	<a href="#">Cleanroom Wash &amp; Packaging</a> → P.792	<a href="#">Screw Length Adjustment</a> → P.796	<a href="#">Vibration Resistant</a> → P.795	<a href="#">Modification process for captive use</a> → P.791
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Not Available