


SVST Socket Head Cap Screws with Ventilation Hole - Titanium




[WEB Selection Tool](#)
[WEB CAD Download](#)
[Vacuum](#)
[Cleanroom wash & packaging](#)
[Non-Magnetic](#)

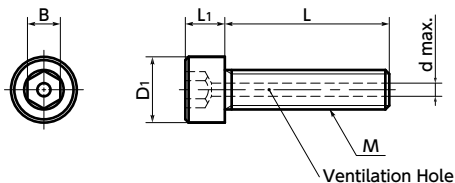

● Usage example

Gas trapped at the bottom of a screw hole is released through **SVST**, and gas trapped in a drilled hole is released through **SWAT-VF** (→ P.575).

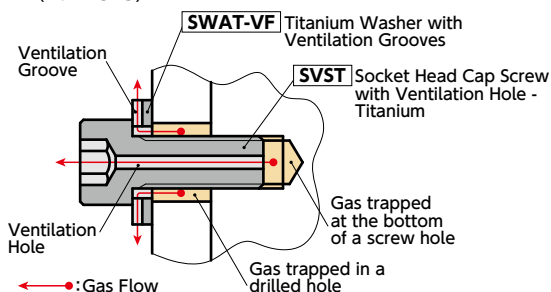

● Part number specification

SVST-M5-20



- The ventilation hole easily releases gas trapped in the screw holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- Chemical polishing and brightening processing improve the quality of the surface. Outgas quantity is extremely low.
- Nonmagnetic.
- The features of brightening processing and titanium → P.624
- Application

Vacuum devices, vacuum chambers, FPD production equipment, semiconductor devices, and electron microscopes

● Material/Finish

RoHS Compliant

SVST	
Main Body	TB340C (Grade 2 Titanium)

● Related Products

SNST Titanium Socket Head Cap Screw without Ventilation hole is available. → P.627



Unit : mm

Part Number	M	L	D1	L1	B	d	Mass (g)	Qty per pack
SVST-M3-5	M3	5	5.5	3	2.5	1.2	0.38	1
SVST-M3-6	M3	6	5.5	3	2.5	1.2	0.4	1
SVST-M3-8	M3	8	5.5	3	2.5	1.2	0.45	1
SVST-M3-10	M3	10	5.5	3	2.5	1.2	0.5	1
SVST-M3-12	M3	12	5.5	3	2.5	1.2	0.54	1
SVST-M3-16	M3	16	5.5	3	2.5	1.2	0.66	1
SVST-M3-20	M3	20	5.5	3	2.5	1.2	0.77	1
SVST-M4-8	M4	8	7	4	3	1.5	0.94	1
SVST-M4-10	M4	10	7	4	3	1.5	1	1
SVST-M4-12	M4	12	7	4	3	1.5	1.1	1
SVST-M4-16	M4	16	7	4	3	1.5	1.3	1
SVST-M5-10	M5	10	8.5	5	4	1.5	1.5	1
SVST-M5-12	M5	12	8.5	5	4	1.5	1.7	1
SVST-M5-16	M5	16	8.5	5	4	1.5	2	1
SVST-M5-20	M5	20	8.5	5	4	1.5	2.3	1
SVST-M5-25	M5	25	8.5	5	4	1.5	2.7	1

[Individual Sales → P.794](#)
[Cleanroom Wash & Packaging → P.792](#)
[Screw Length Adjustment → P.796](#)
[Vibration Resistant → P.795](#)
[Modification process for captive use → P.791](#)

1 unit in 1 bag | Cleanroom washed and packed | Available / Add'l charge | Not Available | Please feel free to contact us