


Number of connectable antenna	2CH
Interface	CC-Link

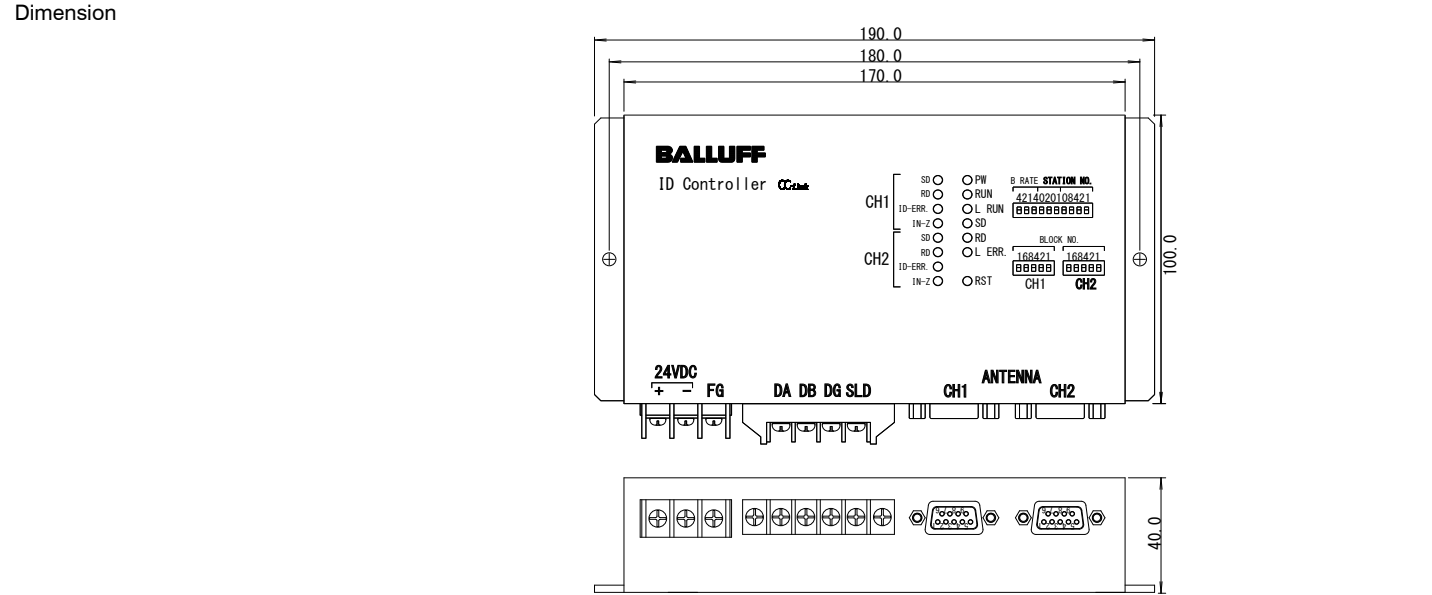

Interface	CC-Link
	4 pole Terminal block

Type	Applicable Data carrier 8K bytes	BIS S-404-30-KBT01
------	----------------------------------	--------------------

Supply voltage	24V DC ± 10%
Current consumption	0.8A
Operating temperature range	0...+55°C

Connection to Read/ write head	D-sub connector connection
Connection to Host PLC	CC-Link cable <sup>1)</sup>

Remarks	
---------	--

Please request the instruction manual for details about specifications

1) Please prepare the cable for CC-Link.