


Read/write system Mini flag / Processor


Interface Parallel

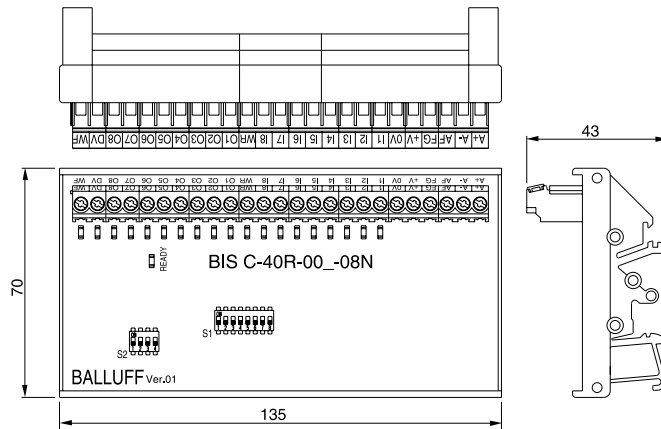

Processing data amount		8 bits	16 bits · 64 bits
Type	NPN	BIS C-40R-001-08N	BIS C-40R-002-08N
	PNP	BIS C-40R-001-08P	BIS C-40R-002-08P
I/O specification		Input:9 <sup>1)</sup> Ouput:10 (incl. data valid)	
Supply voltage		24V DC+10-20%	
Current consumption		max.500mA	
Operating temperature range		0...+55°C	
Indicator		Input signal like as data valid(19 signals) · Ready signal	
Mounting		DIN rail (32 or 35mm wide)	
Connection		Terminal block25 pole	
Remarks		cableBIS4DBX01for Read/ write head included	

1)Address select input (3bits) of 64 bits type shared with upper 3 bits of data input.

Cable for Read/ write head (included)

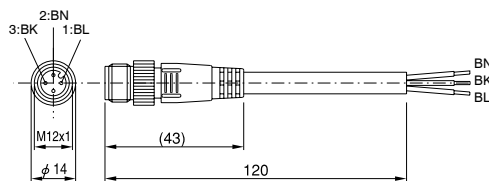

Type	Connectable Read/ write head
BIS 4DBX01	Type BIS C-305 / BIS C-306 / BIS C-310 / BIS C-315