


SET/SETS Hexalobular Socket Head Cap Screws with Extreme Low Profile

WEB Selection Tool | WEB CAD Download | Protrusion | SUS Stainless steel

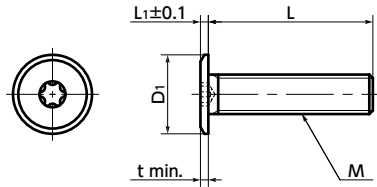

● **Application**
Reducing the size of equipment and devices

● **Material/Finish** RoHS Compliant

	SET-NI	SET-BNI	SETS
Main	SWCH	SWCH	SUSXM7
Body	Nickel Plating	Black Nickel Plating	(S.S. grade : A2)

- Hexalobular* socket head cap screws with extra low profiles.
- Intended for reducing the size of devices and applications with limited overhead space.
- The hexalobular* shape can withstand high tightening torque. → P.712

*The hexalobular shape is prescribed by JIS B 1015 : 2008 (ISO 10664 : 2005) "Hexalobular internal driving feature for bolts and screws"

- Install and remove by using **SKX** Specialty Hexalobular Key. → P.715



- Also, products with special specifications such as ventilation holes, dimensions, shapes, materials, surface treatments, cleanroom washing & packaging are available.
→ P.544



SET-NI Steel - Nickel Plating

Part Number	M	L						D1	L1	Applicable wrench	Hexalobular Socket No.	t	Max. Torque (N·m)	Mass (g)
		2	3											
SET-M3-NI	M3	6	8	10				7	0.8	SKX-6	6	0.75	0.7	0.39 - 0.56
SET-M4-NI	M4	6	8	10	12	16		8	0.9	SKX-8	8	0.9	2.3	0.65 - 1.4
SET-M5-NI	M5		8	10	12	16	9	1	SKX-10	10	1	4	0.73 - 1.7	

Part Number	Qty*1 per pack
SET-M3-NI	20
SET-M4-NI	20
SET-M5-NI	20

*1 The minimum order quantity is 1 piece. → P.794

SET-BNI Steel - Black Nickel Plating

Part Number	M	L						D1	L1	Applicable wrench	Hexalobular Socket No.	t	Max. Torque (N·m)	Mass (g)
		2	3											
SET-M3-BNI	M3	6	8	10				7	0.8	SKX-6	6	0.75	0.7	0.39 - 0.56
SET-M4-BNI	M4	6	8	10				8	0.9	SKX-8	8	0.9	2.3	0.65 - 0.95
SET-M5-BNI	M5		8	10	12	16	9	1	SKX-10	10	1	4	0.73 - 1.7	

Part Number	Qty*1 per pack
SET-M3-BNI	20
SET-M4-BNI	20
SET-M5-BNI	20

*1 The minimum order quantity is 1 piece. → P.794

SETS Stainless Steel

Part Number	M	L											D1	L1	Applicable wrench	Hexalobular Socket No.	t	Max. Torque (N·m)	Mass (g)	
		2	3																	
SETS-M2	M2	4	5	6	8	10	12							4 _{-0.4}	0.5	SKX-4	4	0.4	0.15	0.047 - 0.23
SETS-M2.6	M2.6	4	5	6	8	10	12							6 _{-0.5}	0.6	SKX-5	5	0.5	0.3	0.17 - 0.41
SETS-M3	M3			6	8	10	12	16						7 _{-0.5}	0.8	SKX-6	6	0.75	0.6	0.39 - 0.84
SETS-M4	M4			6	8	10	12	16	20	25				8 _{-0.5}	0.9	SKX-8	8	0.9	1.5	0.65 - 2.3
SETS-M5	M5				8	10	12	16	20	25	30			9 _{-0.5}	1	SKX-10	10	1	3.1	0.73 - 3.8
SETS-M6	M6				8	10	12	16	20	25	30	35	40	12 _{-0.6}	1.2	SKX-20	20	1.2	5.3	1.7 - 8.4

Part Number	Qty*1 per pack
SETS-M2	20
SETS-M2.6	20
SETS-M3	20
SETS-M4	20
SETS-M5	20
SETS-M6	20

*1 The minimum order quantity is 1 piece. → P.794

● Part number specification

SET - M3 - 8 - NI

Order in number of packs.
The minimum order quantity is 1 piece. → P.794

Individual Sales → P.794 | Cleanroom Wash & Packaging → P.792 | Screw Length Adjustment → P.796 | Vibration Resistant → P.795 | Modification process for captive use → P.791
 Available / Add'l charge | Available / Add'l charge | Available / Add'l charge | Available / Add'l charge | Please feel free to contact us