




# SLHS Socket Head Cap Screws with Low Profile

WEB Selection Tool

WEB CAD Download

Protrusion

SUS Stainless steel

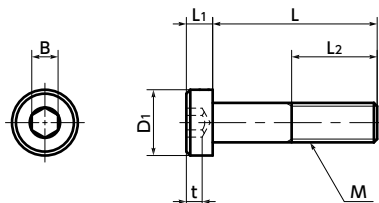

## ● Material/Finish

RoHS Compliant

	SLHS
Main Body	SUSXM7 (S.S. grade : A2)
Strength Class	A2-50

- Socket head cap screws have low head heights.
- Intended for reducing the size of devices and applications with limited overhead space.
- Also, **[SVLS]** Socket Head Cap Screws with Low Profile with Ventilation Hole is available. → P.565
- Application

Reducing the size of equipment and devices

## SLHS SUSXM7

Unit : mm

Part Number ①	M	L ②										D1	L1	B*2	t	L2*1	Max. Torque (N·m)	Mass (g)			
<b>SLHS-M2</b>	M2	5	6	8	10	12								3.8	1.3	1.3	0.7	Full Thread	0.18	0.13 - 0.29	
<b>SLHS-M2.5</b>	M2.5	5	6	8	10	12								4.5	1.6	1.5	1	Full Thread	0.36	0.26 - 0.47	
<b>SLHS-M3</b>	M3	5	6	8	10	12	16	20						5.5	2	2	1.5	12(L=20)	0.6	0.5 - 1.2	
<b>SLHS-M4</b>	M4		6	8	10	12	16	20	25					7	2.8	2.5	2.3	Full Thread	1.5	1.1 - 2.8	
<b>SLHS-M5</b>	M5			8	10	12	16	20	25	30	35			8.5	3.5	3	2.7	16(L≥30)	3.1	1.8 - 5.7	
<b>SLHS-M6</b>	M6			8	10	12	16	20	25	30	35	40	45	10	4	4	3	18(L≥30)	5.3	3.1 - 11	
<b>SLHS-M8</b>	M8				10	12	16	20	25	30	35	40	45	50	13	5	5	3.8	22(L≥35)	12	7.2 - 22
<b>SLHS-M10</b>	M10						16	20	25	30	35	40	45	50	16	6	6	4.5	32(L≥45)	25	15 - 33

\*1 If the "L" value is other than the value in parentheses, the screw is full thread.


\*2 The hexagonal width across flat of **[SLHS-M10]** has been changed from 7 mm to 6 mm.

Part Number	Qty*1 per pack
<b>SLHS-M2</b>	50
<b>SLHS-M2.5</b>	50
<b>SLHS-M3</b>	50
<b>SLHS-M4</b>	50
<b>SLHS-M5</b>	50
<b>SLHS-M6</b>	20
<b>SLHS-M8</b>	20
<b>SLHS-M10</b>	10

\*1 The minimum order quantity is 1 piece. → P.794

## ● Part number specification

### SLHS-M5 - 20



Order in number of packs.

The minimum order quantity is 1 piece. → P.794

Individual Sales → P.794	Cleanroom Wash & Packaging → P.792	Screw Length Adjustment → P.796	Vibration Resistant → P.795	Modification process for captive use → P.791
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge