


SWAT-VF Washers with Ventilation Grooves - Titanium



- WEB Selection Tool
- WEB CAD Download
- Vacuum
- Cleanroom wash & packaging
- Non-Magnetic



- The ventilation groove easily releases gas trapped in the drill holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- Combine this item with **SVST** Socket Head Cap Screws with Ventilation Hole - Titanium (➔ P.564).

● Application

Vacuum devices, vacuum chambers, FPD production equipment, semiconductor devices, and electron microscopes

● Material/Finish

RoHS Compliant


	SWAT-VF
Main Body	TP340C (Grade 2 Titanium)

Unit : mm

Part Number	Nominal	d	D	t	Mass (g)	Qty per pack
SWAT-3-VF	3	3.2	7	0.5	0.068	1
SWAT-4-VF	4	4.3	9	0.8	0.18	1
SWAT-5-VF	5	5.3	10	1	0.25	1

● Usage example

Gas trapped at the bottom of a screw hole is released through **SWAT-VF**, and gas trapped in a drilled hole is released through **SVST** (➔ P.564).

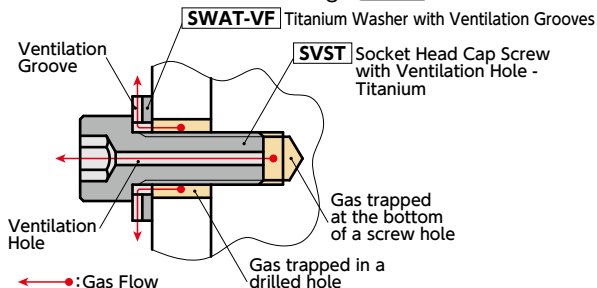

● Related Products

SWAT Titanium Washers without a ventilation groove is available.
➔ P.634



● Part number specification

SWAT-4-VF



Individual Sales ➔ P.794	Cleanroom Wash & Packaging ➔ P.792	Screw Length Adjustment ➔ P.796	Vibration Resistant ➔ P.795	Modification process for captive use ➔ P.791
1 pc. in 1 bag	Cleanroom washed and packed	Not Available	Not Available	Not Available